

Tenax
WITH US

Professional
TOP SELECTION

Index

00

TENAX

INNOVATE WITH US	2
INDUSTRIAL	3
PROFESSIONAL	3

04

PROTECTION

SEALERS	21
ENHANCERS	23

01

RESINING & LAMINATION

EPOXY SYSTEMS	4
---------------------	---

05

FINISHING

WAXES	25
VARNISHES	26

02

POLISHING

EDGE POLISHERS	6
• MANUAL	6
• AUTOMATIC	7

06

INSTALLATION

SILICONS	27
ADHESIVES	28

03

BONDING

MASTICS AND GLUES	10
• POLYESTER	10
• POLYEPOXY	12
• VINYLESTER	13
• EPOXY	14
• GLAXS	15
SPECIAL	16
• GLUE IN CARTRIDGE	16

07

CLEANING & MAINTENANCE

DETERGENTS	29
PROBLEM SOLVERS	31



Innovate with us

We always work alongside our customers with technological and innovative solutions for the processing of natural stone and ceramics.

For over 65 years, Tenax has been providing research, technology and innovation for the NATURAL STONE, CERAMIC and ENGINEERED STONE surfaces sector. Through the INDUSTRIAL and PROFESSIONAL divisions, it offers effective solutions for the entire supply chain: from industrial production to transformation, the construction area and maintenance.

Founded in 1956, Tenax is an Italian company that, thanks to a constantly growing process, is currently a brand found in over 100 countries and recognized worldwide for excellence in the production of mastics, epoxy systems, surface treatments and abrasives.

With 6 branches on 4 continents and a comprehensive team of specialists, it supports professionals and companies in achieving their goals.



Industrial

State-of-the-art technological solutions for the Natural Stone, Ceramic and Engineered stone industries.

With over sixty years of experience, Tenax is a leader in industrial processing thanks to a complete range of cutting-edge solutions able to accompany the customer at all stages of processing. TENAX is structured to provide an effective response to the specific needs of the Natural Stone, Ceramic and Engineered stone Industries with dedicated product lines to respond quickly to market developments and customization requests. Mastics, resins, abrasives, surface treatments and tools specifically designed to guarantee the best performance, increasingly refined processing and enhance the qualities of the different materials.



Professional

Innovative solutions designed specifically for the processing of Natural Stone, Ceramic and Engineered stone surfaces.

Professional is the Tenax division completely dedicated to the processing of surfaces by fabricators, marble workers, maintenance workers and craftsmen, with products specifically designed for needs other than industrial processing. With this division, Tenax has made available its enormous wealth of experience at the service of every single professional, offering a complete line of solutions that can guarantee the desired results on all surfaces.



Epoxyart Kit 2 to 1EPOXY SYSTEM KIT 2:1 FOR RESINING,
NETTING AND REPAIRING

COD. 00031868

COD. 00031869



Natural stone



Epoxy system to resin and nett stone materials. The use of this epoxy system is particularly suitable where high penetration is required, in case of micro-cracks or when you want to increase the tone of the material.

- ◆ **Appearance:** clear hazy-liquid
- ◆ **Colorable:** Universal coloring pastes
- ◆ **Mixing ratio:** 2+1
- ◆ **Gel time in bulk (25°C):** 55-75min
- ◆ **Working time:** 24h



LOW VISCOSITY



MEDIUM HARDNESS



SUPERB ADHESION

Epoxyart Kit 3 to 1EPOXY SYSTEM KIT 3:1 FOR RESINING,
NETTING AND REPAIRING

COD. 00031866

COD. 00031867



Natural stone



Epoxy system to resin and nett stone materials. The use of this epoxy system is particularly suitable where high transparency in the cracks of the material, high penetration and slow hardening time are required or for the creation of small masses of resin.

- ◆ **Appearance:** liquid transparent
- ◆ **Colorable:** Universal coloring pastes
- ◆ **Mixing ratio:** 3+1
- ◆ **Gel time in bulk (25°C):** 150-180min
- ◆ **Working time:** 24-48h



LOW VISCOSITY



MEDIUM HARDNESS



GOOD REACTIVITY TO COLD

Epoxyart Kit 4 to 1EPOXY SYSTEM KIT 4:1 FOR RESINING,
NETTING AND REPAIRING

COD. 00031860

COD. 00031861



Natural stone



Fast epoxy system to resin and nett stone materials. The use of this epoxy system is particularly suitable where a natural effect is required, without altering the colour of the material. Its formulation combines the high reaction speed with low yellowing over time.

- ◆ **Appearance:** liquid transparent
- ◆ **Colorable:** Universal coloring pastes
- ◆ **Mixing ratio:** 4+1
- ◆ **Gel time in bulk (25°C):** 7-8min
- ◆ **Working time:** 6-8h



MEDIUM VISCOSITY



MEDIUM HARDNESS



SUPERB REACTIVITY TO COLD

Resina RR + BM45H

COD. 00016561

COD. 00013710

LIQUID EPOXY SYSTEM WITH HIGH VISCOSITY

Very viscous transparent epoxy resin, with a good cold reactivity and a high hardness. Suggested for resining and lamination of stone materials. Suitable for working marble, granite,

engineered stone, ceramic and glass. Usable in indoor and outdoors conditions thanks to its low yellowing.



EXCELLENT ADHESION



GOOD TRANSPARENCY



GOOD HARDNESS

- ◆ **Appearance:** liquid transparent
 - ◆ **Colorable:** Universal coloring pastes
 - ◆ **Mixing ratio:** 2+1
 - ◆ **Gel time in bulk (25 °C):** 55-60 min
 - ◆ **Working time (25 °C):** 24h
- Professional use



Natural stone • Ceramic • Quartz



Indoor
Outdoor

Other features:

- ◆ Easily polishable
- ◆ Very bright

Evopad

COD. 00012501

3 STEP SYSTEM FOR MANUAL EDGE POLISHING



Resin diamond pads for the edge polishing with manual equipment. Suitable for marble, granite, ceramic and engineered stone. Usable on wet.



HIGH PERFORMANCE



LONG LIFE



MARBLE, GRANITE, ENGINEERED STONE, CERAMIC



Natural stone • Ceramic • Quartz

Pad Quartz

COD. 00030068

7 STEP SYSTEM FOR MANUAL EDGE POLISHING



Resin diamond pads for the edge polishing with manual equipment. Suitable for engineered stone. Usable on wet.



HIGH PERFORMANCE



LONG LIFE



ENGINEERED STONE



Quartz

Levigacoste T36

COD. 00030693

RESIN DIAMOND EDGE WHEELS

Resin diamond edge wheels for polishing of edge. Usable for marble, granite, ceramics and engineered stone, it guarantees high

performance in terms of gloss and processing speed.



UNIVERSAL sequence for flat edge
for marble, granite,
ceramic, engineered stone



HIGH GLOSS



HIGH SPEED

Spindle 5 sequence	Spindle 6 sequence	Spindle 7 sequence	Spindle 8 sequence
120 W2	120 W2	80 W2	80 W2
220 W2	220 W2	120 W2	120 W2
400 W2	400 W2	220 W2	220 W2
800 W2	800 W2	400 W2	320 W2
1200 Q2	1200 Q2	800 W2	400 W2
	1500 Q2	1200 Q2	800 W2
		1500 Q2	1200 Q2
			1500 Q2

AVAILABLE
GRAINS

60

80

120

220

320

400

600

800

1200

1500

2000

3000



Natural stone • Ceramic • Quartz

Bisello F50

BI125DXFIN/F50: COD. 00022842

BI125DXSINT: COD. 00009328

BI125SXSINT: COD. 00009331

DIAMOND RESIN BEVEL

Diamond resin bevel for polishing the traditional 45-degree bevel. Usable for marble, granite, ceramics and engineered stone, it guarantees

high performance in terms of polish and processing speed.

**NO STREAKS****WILL NOT BLEED ONTO
WHITE ENGINEERED STONE****LONG LIFE**

Natural stone • Ceramic • Quartz

AVAILABLE
GRAINS

120

220

280

400

600

800

1200

Levigacoste T3

RESIN DIAMOND EDGE WHEELS

COD. 00014641



Resin diamond edge wheels for polishing of edge or bullnose. Usable for marble, granite, ceramics and engineered stone, it guarantees high performance in terms of gloss and processing speed.

**NO STREAKS****WILL NOT BLEED ONTO WHITE ENGINEERED STONE****LONG LIFE****IDEAL FOR EDGE AND BULLNOSE**

Natural stone • Ceramic • Quartz

AVAILABLE
GRAINS

60 80 120 220 400 600 800 1200 1500 2000

Dripflex

LAMELLAR BRUSH

COD. 00024679



Lamellar brush for surface toning. Suitable for processing all materials, it serves to lower the gloss by increasing the tone of the material.

**MULTIMATERIAL****IDEAL ALSO FOR DELICATE MATERIALS****LONG LIFE**

Natural stone • Ceramic • Quartz

AVAILABLE
GRAINS

60 120 220 320 400

Solido

COD. 00034601

COLORED SOLID POLYESTER MASTIC

Strong and rapid colored mastic with low yellowing. Soft and easy to spread, it is ideal for

visible bonding, laminations and repairs.



STRONG AND RAPID BONDING



VERY SOFT



EXCELLENT SPREADABILITY

- ◆ **Appearance:** colored paste
- ◆ **Colorable:** Universal coloring pastes
- ◆ **Mixing ratio:** 100+2/3
- ◆ **Gel time in bulk (25 °C):** 4-5 min
- ◆ **Tacky free in thin layer (25°C):** 25-30 min
- ◆ **Working time (25 °C):** 60-80 min



Natural stone
Quartz

Other features:

- ◆ Easily polishable
- ◆ Very bright



Tixo XE

TRANSPARENT SOLID POLYESTER MASTIC

COD. ART 00034639



Strong and ultra-fast low-yellowing transparent mastic. Soft and easy to spread, it does not lose verticality and is ideal for visible bonding, lamination and repairs.

- ◆ **Appearance:** transparent paste
- ◆ **Colorable:** Universal coloring pastes
- ◆ **Mixing ratio:** 100+2/3
- ◆ **Gel time in bulk (25°C):** 2-5 min
- ◆ **Tacky free in thin layer (25°C):** 30 min
- ◆ **Working time (25 °C):** 35-50 min



STRONG AND ULTRA-FAST BONDING



SOFT



EXCELLENT SPREADABILITY



Other features:

- ◆ Does not halo
- ◆ Very bright



Thassos T

TRANSPARENT SOLID POLYESTER MASTIC

COD. ART 00034651



Strong transparent mastic with low yellowing. Due to its easy application and long working time, it is ideal for large area laying, lamination, bonding and repairs.

- ◆ **Appearance:** transparent paste
- ◆ **Colorable:** Universal coloring pastes
- ◆ **Mixing ratio:** 100+2/3
- ◆ **Gel time in bulk (25 °C):** 6-8 min
- ◆ **Tacky free in thin layer (25°C):** 90-120 min
- ◆ **Working time (25 °C):** 2-3 h



STRONG BONDING



LOW YELLOWING



EASY TO APPLY



Other features:

- ◆ Easily polishable
- ◆ Very bright



	Product	Liquido trasp	Liquido	Thassos T	Solido trasp	Solido	Solido 3G	Tixo XE	Solido XQ	Solido XT
Appearance	Transparent	◆	◇	◆	◆	◇	◇	◆	◇	◇
	Colored	◇	◆	◇	◇	◆	◆	◇	◆	◆
	Yellowing	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
Use	Filling	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
	Grouting	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
	Edge-to-edge	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
	45° and/or T (90°)	✕	✕	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
	Sandwich	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
	Structural multi-material adhesion	✕	✕	✕	✕	✕	✕	✕	✕	✕
Materials	Marble	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Granite	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Quartzite	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Engineered Stone	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Ceramic	✕	✕	✕	✕	✕	✕	✕	✓	✓
	Other suitable materials	✕	✕	✕	✕	✕	✕	✕	✕	✕
Technical information	Gel time in bulk at 25°C (min)	5-8	3-4	6-8	6-9	3-4	3-4	2-5	3-5	10-20
	Working time at 25°C (min)	60-80	60-80	90-120	65-75	60-80	60-80	35-50	60-80	30-45

[illegible]

Polytenax Wet

COD. 00034717

SOLID POLYEPOXY GLUE

Solid colored glue with high performance in terms of bonding strength and speed. Soft and easy to

spread, it is ideal for gluing and bonding even on wet surfaces.

**STRONG AND FAST BONDING****BONDING EVEN ON WET SURFACES****IDEAL FOR LAMINATION**

- ◆ **Appearance:** colored paste
- ◆ **Colorable:** Universal coloring pastes
- ◆ **Mixing ratio:** 100+1/3
- ◆ **Gel time in bulk (25 °C):** 4-5 min
- ◆ **Tacky free in thin layer (25°C):** 10-15 min
- ◆ **Working time (25 °C):** 25-30 min



Natural stone • Ceramic • Quartz

Other features:

- ◆ Does not halo
- ◆ Easily polishable



Gravity

COD. 00036290

EXTRA CLEAR KNIFE GRADE VINYLESTER GLUE

Extra strong and ultra fast extra clear glue characterized by freeze and heat resistance and

an excellent color stability. Multi-material, it is ideal for visible bonding and lamination.



**EXTREME AND
ULTRA-FAST BONDING**



UV STABLE



FREEZE AND HEAT RESISTANT

- ◆ **Appearance:** transparent paste
- ◆ **Colorable:** Universal coloring pastes
- ◆ **Mixing ratio:** 100+1/3
- ◆ **Gel time in bulk (25 °C):** 3.30-4.30 min
- ◆ **Tacky free in thin layer (25°C):** 20-35 min
- ◆ **Working time (25 °C):** 25-40 min



Natural stone • Ceramic • Quartz



Freeze & Heat



Titanium

SOLID VINYLESTER GLUE

COD. 00034648

Extra strong and fast transparent glue characterized by the low yellowing and excellent color stability. Multi-material and available in

both versions liquid and solid, it is ideal for visible bonding and lamination.



EXTRA STRONG AND FAST BONDING



LOW YELLOWING



IDEAL FOR VISIBLE BONDING

- ◆ **Appearance:** transparent or colored paste
- ◆ **Colorable:** Universal coloring pastes
- ◆ **Mixing ratio:** 100+1/3
- ◆ **Gel time in bulk (25 °C):** 4.00-5.00 min
- ◆ **Tacky free in thin layer (25 °C):** 25-40 min
- ◆ **Working time (25 °C):** 40-60 min



Natural stone • Ceramic • Quartz

Other features:

- ◆ Does not halo
- ◆ Very bright



Titanium

LIQUID VINYLESTER GLUE

COD. 00034649

Extra strong and fast transparent glue characterized by the low yellowing and excellent color stability. Multi-material and available in

both versions liquid and solid, it is ideal for visible bonding and lamination.



EXTRA STRONG AND FAST BONDING



LOW YELLOWING



IDEAL FOR VISIBLE BONDING

- ♦ **Appearance:** liquid transparent
- ♦ **Colorable:** Universal coloring pastes
- ♦ **Mixing ratio:** 100+1/3
- ♦ **Gel time in bulk (25 °C):** 4.30-5.30 min
- ♦ **Tacky free in thin layer (25°C):** 30-45 min
- ♦ **Working time (25 °C):** 45-60 min



Natural stone • Ceramic • Quartz

Other features:

- ♦ Does not halo
- ♦ Very bright



Freeze & Heat

Product		Polytenax wet	Titanium liquido	Titanium solido	Gravity
Appearance	Transparent	◇	◆	◆	◆
	Colored	◆	◇	◇	◇
	Yellowing	◆◆◆◇◇	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
Use	Filling	◆◆◆◇◇	◆◆◆◆◆	◆◆◆◆◇	◆◆◆◆◇
	Grouting	◆◆◆◇◇	◆◆◆◇◇	◆◆◆◆◆	◆◆◆◆◆
	Edge-to-edge	◆◆◆◇◇	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
	45° and/or T (90°)	×	×	◆◆◆◆◆	◆◆◆◆◆
	Sandwich	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
	Structural multi-material adhesion	×	×	×	×
Materials	Marble	✓	✓	✓	✓
	Granite	✓	✓	✓	✓
	Quartzite	✓	✓	✓	✓
	Engineered Stone	✓	✓	✓	✓
	Ceramic	✓	✓	✓	✓
	Other suitable materials	×	×	×	×
Technical information	Gel time in bulk at 25°C (min)	4-5	4.30-5.30	4-5	3.30-4.30
	Working time at 25°C (min)	25-30	45-60	40-60	25-40

This image shows a single sheet of white paper with horizontal blue ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

Eliox A+B

COD. A 00034658

COD. B 00034661

EXTRA CLEAR SOLID EPOXY MASTIC

Extra strong and extra clear solid mastic. Its very low yellowing, extreme spreadability and shiny,

glossy appearance make it ideal for exposed bonding, facades and flooring.



✚ EXTRA STRONG BONDING

✚ VERY LOW YELLOWING

✚ IDEAL FOR VISIBLE BONDING

- ◆ **Appearance:** colored paste
- ◆ **Colorable:** Universal coloring pastes
- ◆ **Mixing ratio:** 100+50
- ◆ **Gel time in bulk (25 °C):** 10-15 min
- ◆ **Tacky free in thin layer (25°C):** 3h - 3h 30min



Natural stone • Ceramic • Quartz



Indoor
Outdoor



Food safety declaration

DM 21/03/1973 - Reg. UE 10/2011



Domo 10 A+B

SOLID EPOXY MASTIC

COD. kit 00034611

Solid mastic with extreme performance in terms of bonding force and strength. Suitable for bonding and lamination, even on wet surfaces,

it is also ideal for mixed bonding and under extreme temperatures.



EXTREME BONDING



EVEN ON WET SURFACES



IDEAL FOR LAMINATION AND MIXED BONDING

- ◆ **Appearance:** colored paste
- ◆ **Colorable:** Universal coloring pastes
- ◆ **Mixing ratio:** 100+100
- ◆ **Gel time in bulk (25°C):** 2h 30min
- ◆ **Tacky free in thin layer (25°C):** 4h



Natural stone • Ceramic • Quartz



**Indoor
Outdoor**



Fixtop A+B

SOLID EPOXY MASTIC

COD. kit 00034775

Extra strong and fast curing solid mastic. The bond strength, high mechanical strengths make it ideal for safe and durable bonding and

lamination. Also suitable for mixed bonding.



EXTRA STRONG AND RAPID BONDING



SOFT AND EASY TO SPREAD



IDEAL FOR LAMINATION AND MIXED BONDING

- ◆ **Appearance:** colored paste
- ◆ **Colorable:** Universal coloring pastes
- ◆ **Mixing ratio:** 100+100
- ◆ **Gel time in bulk (25 °C):** 30-40 min
- ◆ **Tacky free in thin layer (25°C):** 2h 30min



Natural stone • Ceramic • Quartz



**Indoor
Outdoor**



Glaxs Easy

TRANSPARENT GLUE ZERO YELLOWING

COD. 00036546

COD. 00036547

Extra strong and extra clear solid glue characterized by total absence of yellowing in the sun over time. Very easy to dose it is completely

invisible, easily polished and suitable for extreme temperatures. Ideal for all visible bonding.



 **EXTRA STRONG BONDING**

 **EXTRA CLEAR**

 **EASY DOSING**

- ♦ **Appearance:** transparent paste
- ♦ **Colorable:** Universal coloring pastes
- ♦ **Mixing ratio:** 100+100
- ♦ **Gel time in bulk (25 °C):** 6-8 min
- ♦ **Tacky free in thin layer (25°C):** 100 min
- ♦ **Working time (25 °C):** 150 min
- ♦ Very low VOC emissions, achieving the Eurofins Indoor Air Comfort Gold recognition



Product		Domo 10	Fixtop	Rivo	Strong Edge45	Eliox	Glaxs Easy
Appearance	Transparent	◇	◇	◇	◆	◆	◆
	Colored	◆	◆	◆	◇	◇	◇
	Yellowing	◆◆◆◆◇	◆◆◆◆◇	◆◆◆◆◇	◆◆◆◆◆	◆◆◆◆◆	Zero
Use	Filling	◆◆◆◆◇	◆◆◆◆◇	◆◆◆◆◇	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
	Grouting	◆◆◆◆◇	◆◆◆◆◇	◆◆◆◆◇	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
	Edge-to-edge	◆◆◆◆◇	◆◆◆◆◇	◆◆◆◆◇	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
	45° and/or T (90°)	◆◆◆◆◇	◆◆◆◆◇	◆◆◆◆◇	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
	Sandwich	◆◆◆◆◇	◆◆◆◆◇	◆◆◆◆◇	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
	Structural multi-material adhesion	✓	✓	✓	✗	✗	✗
Materials	Marble	✓	✓	✓	✓	✓	✓
	Granite	✓	✓	✓	✓	✓	✓
	Quartzite	✓	✓	✓	✓	✓	✓
	Engineered Stone	✓	✓	✓	✓	✓	✓
	Ceramic	✓	✓	✓	✓	✓	✓
	Other suitable materials	✓	✓	✓	✗	✗	✗
Technical information	Gel time in bulk at 25°C (min)	150	30-40	15-20	8-13	15-20	6-8
	Working time at 25°C (min)	24 h	24 h	24 h	24 h	24 h	150

[illegible]

Glaxs Fast

COD. 00034575

FAST ZERO YELLOWING GLUE

Zero yellowing glue in convenient cartridge format. Extreme bonding strength, fast curing and maximum color stability in sunlight make

it the deale for 45° multimaterial bonding both indoors and outdoors.



⬢ EXTRA STRONG

⬢ ZERO HALOS

⬢ MAXIMUM STABILITY IN SUNLIGHT

- ◆ **Appearance:** transparent or colored gel
- ◆ **Gel time in bulk (25 °C):** 3-5 min
- ◆ **Working time (25 °C):** 45-60 min



Natural stone • Ceramic • Quartz



Indoor
Outdoor

Other features:

- ◆ Does not drip
- ◆ Easily polishable

Glaxs Ultrafast

ULTRA FAST ZERO YELLOWING GLUE

COD. ART 00034711



Zero yellowing glue in convenient cartridge format. Extreme bonding strength, ultra-fast curing and maximum color stability in sunlight make it the ideal for multi-material exposed bonding both indoors and outdoors.

- ◆ **Appearance:** transparent or colored gel
- ◆ **Gel time in bulk (25 °C):** 1 min
- ◆ **Working time:** 15 min

 **EXTRA FAST**

 **ZERO HALOS**

 **MAXIMUM COLOR STABILITY**



Natural stone • Ceramic • Quartz

Indoor
Outdoor

Other features:

- ◆ Does not drip
- ◆ Easily polishable

Domo21

COLORED EPOXY GLUE

COD. ART 00034707



Colored epoxy glue in convenient cartridge format. Extra strong and multi-material it is ideal for indoor and outdoor lamination, even on wet surfaces.

- ◆ **Appearance:** colored gel
- ◆ **Gel time in bulk (25 °C):** 10-15 min
- ◆ **Working time:** 2h30min

 **EXTRA STRONG**

 **IDEAL FOR LAMINATION**

 **BONDING EVEN ON WET SURFACES**



Natural stone • Ceramic • Quartz

Indoor
Outdoor

Other features:

- ◆ Does not drip
- ◆ Low shrinkage

Eliox

COD. ART 00034706

TRANSPARENT EPOXY GLUE

Transparent glue in the convenient cartridge format. High color strength and stability, very low yellowing and long working time make it the ideal glue for exposed bonding, lamination and grouting.

- ◆ **Appearance:** transparent or colored gel
- ◆ **Gel time in bulk (25 °C):** 10-15 min
- ◆ **Working time:** 24h

**EXTRA STRONG****LONG WORKING TIME****VERY LOW YELLOWING**

Natural stone • Ceramic • Quartz

Indoor
OutdoorFood safety declaration
DM 21/03/1973 - Reg. UE 1831/2003**Other features:**

- ◆ High color stability to light
- ◆ Does not drip

Terod

COD. ART 00034176

PASTE GLUE FOR RODDING

Extra strong and ultra fast paste glue specifically for rodding. Maximum elasticity, low shrinkage and high tightness make it the ideal for under-top structural reinforcement (rodding).

- ◆ **Appearance:** colored gel
- ◆ **Gel time in bulk (25 °C):** 3-6 min
- ◆ **Working time:** 18-24 min

**EXTRA STRONG AND ULTRA-FAST BONDING****MAXIMUM ELASTICITY****LOW SHRINKAGE**

Natural stone • Ceramic • Quartz

Indoor
Outdoor**Other features:**

- ◆ Does not drip
- ◆ Also ideal for gluing clips in metal

Titanium

COLORED VINYLESTER GLUE

COD. 00034660

Transparent and colored glue in the convenient cartridge format. Strong bonding, fast curing

and wide color range make it ideal for 45° multi-material bonding.



⬡+ ULTRA RAPID

⬡+ STRONG

⬡+ ZERO HALO

- ◆ **Appearance:** transparent or colored gel
- ◆ **Gel time in bulk (25 °C):** 5-7 min
- ◆ **Working time (25 °C):** 20-25 min



Natural stone • Ceramic • Quartz



Food safety declaration

DM 21/03/1973 - Reg. UE 10/2011

Other features:

- ◆ Does not drip
- ◆ Easily polishable

Product		Glaxs Fast Pack	Titanium Cartidge	Glaxs Original	Glaxs Ultrafast	Eliox Cartridge	Domo 21
Appearance	Transparent	♦	♦	♦	♦	♦	◇
	Colored	♦	♦	♦	◇	♦	♦
	Yellowing	Zero	♦♦♦◇◇	Zero	Zero	♦♦♦♦♦	♦◇◇◇◇
Use	Filling	♦♦♦◇◇	♦♦♦◇◇	♦♦♦◇◇	♦♦♦◇◇	♦♦♦◇◇	♦♦♦◇◇
	Grouting	♦♦♦♦♦	♦♦♦♦♦	♦♦♦♦♦	♦♦♦◇◇	♦♦♦◇◇	♦♦♦◇◇
	Edge-to-edge	♦♦♦♦♦	♦♦♦♦♦	♦♦♦♦♦	♦♦♦◇◇	♦♦♦♦♦	♦♦♦◇◇
	45° and/or T (90°)	♦♦♦♦♦	♦♦♦♦♦	♦♦♦♦♦	♦♦♦◇◇	♦♦♦♦♦	♦♦♦◇◇
	Sandwich	♦♦♦♦◇	♦♦♦◇◇	♦♦♦♦◇	♦♦♦◇◇	♦♦♦◇◇	♦♦♦◇◇
	Structural multi-material adhesion	✗	✗	✗	✗	✗	✓
Materials	Marble	✓	✓	✓	✓	✓	✓
	Granite	✓	✓	✓	✓	✓	✓
	Quartzite	✓	✓	✓	✓	✓	✓
	Engineered Stone	✓	✓	✓	✓	✓	✓
	Ceramic	✓	✓	✓	✓	✓	✓
	Other suitable materials	✓	✓	✓	✗	✗	✗
Technical information	Gel time in bulk at 25°C (min)	3-5	5-7	8	1	10-15	10-15
	Working time at 25°C (min)	45-60	20-25	80-90	15	24 h	480

This image shows a single sheet of white paper with horizontal blue ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

Proseal Nano

COD. 00034586

NATURAL EFFECT IMPREGNATOR SEALER

Natural effect water-oil impregnator sealer. Its high penetration capacity and resistance to

weathering make it ideal for extreme and long-lasting protection of surfaces.



- EXTREME LONG-LASTING PROTECTION
- DEEP PENETRATION
- ANTI-GRAFFITI

- ◆ Weather resistant
- ◆ Does not alter the color
- ◆ Does not create surface films
- ◆ Allows the material to breathe



Natural stone
Quartz



Solvent based



Proseal & Proseal FS

NATURAL EFFECT IMPREGNATOR SEALER

COD. ART 00034584

COD. ART 00034693



Natural effect water-oil impregnator sealer. Its high penetration capacity and resistance to weathering make it ideal for high and long-lasting protection of surfaces.

The product complies with the global migration limits referred to Regulations DM 21/03/1973 and EU Regulations 10/2011.

- ◆ Does not create surface film
- ◆ Allows the material to breathe



Solvent based



Food safety declaration

DM 21/03/1973 - Reg. UE 10/2011



Natural stone • Quartz



HIGH LONG-LASTING PROTECTION



ALSO IDEAL FOR LARGE SURFACES



ANTI-GRAFFITI



Hydrex

NATURAL EFFECT SEALER

COD. ART 00034583



Natural effect water-oil repellent sealer. The ease of application makes it ideal even for large surfaces. Approved for food contact.

The product complies with the global migration limits referred to Regulations DM 21/03/1973 and EU Regulations 10/2011.

- ◆ Allows the material to breathe



Solvent based



Food safety declaration

DM 21/03/1973 - Reg. UE 10/2011



Natural stone • Ceramic • Quartz



EASY TO APPLY



ALSO IDEAL FOR LARGE SURFACES



DOES NOT CREATE FILMS



Skudo

NATURAL EFFECT WATER BASED SEALER

COD. ART 00034665



Natural effect water based water-oil repellent sealer approved for food contact. High protection, food contact certification and easy application make it ideal for protecting countertops and even large surfaces.

The product complies with the global migration limits referred to Regulations DM 21/03/1973 and EU Regulations 10/2011.

- ◆ Does not create surface film
- ◆ Allows the material to breathe
- ◆ Very low VOC emissions, achieving the Eurofins Indoor Air Comfort Gold recognition.



Water based



Food safety declaration

DM 21/03/1973 - Reg. UE 10/2011



Natural stone • Ceramic • Quartz




HIGH PROTECTION



IDEAL FOR COUNTERTOPS AND LARGE SURFACES



WEATHER RESISTANT



Ager

COD. 00034556

COLOR ENHANCER IMPREGNATOR SEALER

Color enhancer impregnator sealer wet effect. Its high penetration capacity, long life and weather resistance make it the ideal product

for those looking for a product with extreme performance in terms of wet-effect toning and surface protection.



-  **EXTREME LONG-LASTING ENHANCING**
-  **MAXIMUM PROTECTION**
-  **WEATHER RESISTANT**

- ◆ Penetrates deeply
- ◆ Anti-graffiti
- ◆ Allows the material to breathe



COD. ART 00034589

Ager Tiger

COLOR ENHANCER IMPREGNATOR SEALER



Color enhancer impregnator sealer ideal for edges. Its high penetration capacity and weather resistance make it the ideal product for maximum toning and long-lasting edges protection.

- ◆ Does not create surface films
- ◆ Allows the material to breathe
- ◆ Facilitates cleaning



EXTREME LONG-LASTING ENHANCING



WEATHER RESISTANT




IDEAL FOR EDGES



Natural stone



Solvent based

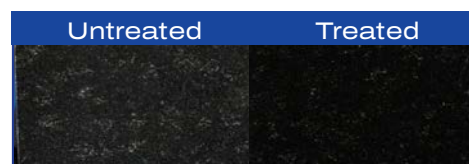

Toner

COLOR ENHANCER SEALER

COD. ART 00034591



Color enhancer sealer approved for food contact. The product features high performance in terms of protection and toning, high yield and easy application for a long-lasting effect. The product complies with the global migration limits referred to Regulations DM 21/03/1973 and EU Regulations 10/2011.

- ◆ Allows the material to breathe
- ◆ Facilitates cleaning



LONG-LASTING PROTECTION AND ENHANCING



EASY TO APPLY



DOES NOT CREATE FILMS



**Natural stone
Quartz**




Solvent based



Food safety declaration

DM 21/03/1973 - Reg. UE 10/2011

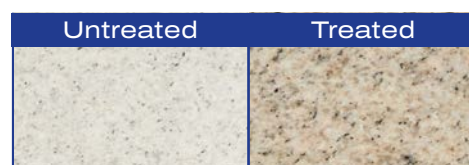

Natural Effect - Solvent Based	Proseal nano	Proseal FS	Proseal	Hydrex	Proseal P	Water proof
Polished Marble	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆	◆◆◆◆◆
Honed/Brushed/Flamed Marble	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
Polished Granite	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
Honed/Brushed/Flamed Granite	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
Polished Exotic Granite	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
Honed/Brushed/Flamed Exotic Granite	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
Polished Quartzite	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
Honed/Brushed/Flamed Quartzite	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
Polished Limestone	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
Honed/Brushed/Flamed Limestone	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
Polished Terrazzo, Cement Agglomerate	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
Honed/Brushed/Flamed Terrazzo, Cement Agglomerate	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
Polished Engineered Stone	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
Honed/Brushed/Flamed Engineered Stone	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
Polished Ceramic	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
Honed/Brushed/Flamed Ceramic	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
Enhances tone	◇◇◇◇◇	◇◇◇◇◇	◇◇◇◇◇	◇◇◇◇◇	◆◆◆◆◆	◇◇◇◇◇
Food safe	No	Yes	No	Yes	Yes	No

Natural Effect - Water Based	Skudo	Skudo shield	Skudo proof
Polished Marble	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
Honed/Brushed/Flamed Marble	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
Polished Granite	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
Honed/Brushed/Flamed Granite	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
Polished Exotic Granite	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
Honed/Brushed/Flamed Exotic Granite	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
Polished Quartzite	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
Honed/Brushed/Flamed Quartzite	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
Polished Limestone	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
Honed/Brushed/Flamed Limestone	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
Polished Terrazzo, Cement Agglomerate	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
Honed/Brushed/Flamed Terrazzo, Cement Agglomerate	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
Polished Engineered Stone	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
Honed/Brushed/Flamed Engineered Stone	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
Polished Ceramic	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
Honed/Brushed/Flamed Ceramic	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
Enhances tone	◇◇◇◇◇	◇◇◇◇◇	◇◇◇◇◇
Food safe	Yes	No	No

Excellent ◆◆◆◆◆

Better ◆◆◆◆◆

Good ◆◆◆◆◆

Medium ◆◆◆◆◆

Low ◆◆◆◆◆

Excellent Better Good Medium Low

This image shows a single sheet of white paper with horizontal blue ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

Cera Pasta

CONCENTRATED PASTE WAX

COD. ART 00034594



Natural stone • Quartz



Concentrated paste wax formulated with special white and extra-pure waxes, gives maximum shine to polished surfaces without creating surface films and ensuring a long-lasting effect.

- ◆ Penetrates deeply
- ◆ Restores the original shine of the material

**MAXIMUM SHINE****NATURAL EFFECT****DOES NOT CREATE FILMS****Other features:**

- ◆ Penetrates in depth
- ◆ Restores the original shine of the material



Solvent based

Cera Fluida

CONCENTRATED LIQUID WAX

COD. ART 00034597



Natural stone • Quartz



Concentrated liquid wax formulated with special white and extra-pure waxes, gives maximum shine to polished surfaces without creating surface films and ensuring a long-lasting effect.

- ◆ Penetrates deeply
- ◆ Restores the original shine of the material

**MAXIMUM SHINE****NATURAL EFFECT****DOES NOT CREATE FILMS****Other features:**

- ◆ Penetrates in depth
- ◆ Restores the original shine of the material



Solvent based

Shinex

LIQUID SILICONE WAX

COD. ART 00034670



Natural stone • Quartz



Fast-drying liquid silicone wax, gives the surface maximum shine with instant effect. Easy to apply it also provides good water-oleophobic protection.

**MAXIMUM SHINE WITH INSTANT EFFECT****QUICK DRYING****ENHANCING EFFECT****Other features:**

- ◆ Water-oil repellent product



Solvent based

Luxor

SELF-POLISHING PAINT

COD. 00034705

Liquid self-polishing paint, gives the surface maximum instant gloss effect. Easy to apply, it

is ideal for edges, columns and all areas where mechanical polishing is difficult.



✚ MAXIMUM INSTANT GLOSSY EFFECT

✚ QUICK DRYING

✚ IDEAL FOR EDGES

- ◆ Surface film form
- ◆ Not walkable

NS C Q
Natural stone • Ceramic • Quartz


Solvent based

Other features:

- ◆ Water-repellent effect

Si Silicone

COD. 00034683

NEUTRAL SILICONE SEALANT

Neutral multi-material silicone sealant ideal for materials that are easy to halo. Elastically seals

and fixes ensuring a watertight and waterproof seal and long-lasting sealing.



✚ IDEAL FOR MARBLE AND ALL NATURAL STONES

✚ PERFECT SEALING

✚ FAST SETTING

- ◆ **Appearance:** transparent or colored paste
- ◆ **Skin formation time at 23°C / 45% r.h.:** 15-30 min



Natural stone • Ceramic • Quartz

Other features:

- ◆ Flexible
- ◆ Resistant to mold and UV rays
- ◆ Does not halo

Super Grip

ONE-COMPONENT MS POLYMER ADHESIVE

COD. 00034708

Paste adhesive specifically for multi-material assembly. Its quick setting, extra strong long-

lasting adhesion and flexibility make it ideal for placing undertops, sinks or tubs.



 **QUICK GRIP**

 **EXTRA STRONG LONG-LASTING ADHESION**

 **FLEXIBLE**

- ♦ **Appearance:** white paste
- ♦ **Skin formation time at 23°C / 45% r.h.:**
 - 15-30 min (neutral)
 - 40-60min (transparent)



Other features:

- ♦ Resistant to humidity
- ♦ Does not contain solvents

Booster Alk Easy

COD. 00034722

UNIVERSAL ALKALINE DEGREASER

Universal alkaline degreaser cleaner in handy spray bottle format. Easy to rinse, it is the ideal ally for strong cleaning of organic and inorganic

stains. Removes dirt and fingerprints quickly while respecting joints and steel.



STRONG AND FAST ACTION



RESPECTS JOINTS AND STEEL



EASY RINSING

- ◆ Ideal for extraordinary cleaning and removal of water, wine, coke, coffee, daily food dirt, fruit stains, fingerprints, wax residue.



Natural stone • Ceramic • Quartz



Water based



Professional



Briotop

NEUTRAL DETERGENT

COD. ART 00034724
COD. ART 00034725



Natural stone • Ceramic • Quartz



Neutral detergent in handy spray bottle format. Ideal for cleaning all surfaces, it is the ideal ally for daily cleaning. It requires no rinsing and, thanks to its formulation, leaves no haloes and dries quickly.

- ◆ Also ideal for glass

- ⊕ FOR ALL SURFACES
- ⊕ LEAVES NO HALOES
- ⊕ FAST DRYING



Water based



Booster Alk

CONCENTRATED ALKALINE DEGREASER

COD. ART 00034688



Natural stone • Ceramic • Quartz




Concentrated alkaline degreaser cleaner formulated for removing the most stubborn dirty, treatment residues and epoxy residues. It deeply cleans surfaces by quickly removing even stratified grease.

- ◆ Ideal for extraordinary cleaning and removal of organic stains and inorganic
- ◆ Stains blackened floors

- ⊕ EXTRA STRONG
- ⊕ CLEANS DEEPLY
- ⊕ QUICKLY REMOVES LAYERED FAT



Water based Professional



Booster Acid

CONCENTRATED ACID DESCALER

COD. ART 00034682



Natural stone • Ceramic • Quartz



Concentrated acid descaler, the specific ally for end-of-site cleaning. Extra strong, removes the most stubborn scorch while respecting joints and steel. Avoid polished marble surfaces.

- ◆ Removes all cement residues, residues of paint, mortar, stucco, plaster.
- ◆ Eliminates limescale and salt efflorescence.

- ⊕ EXTRA STRONG
- ⊕ IDEAL FOR END-OF-SITE CLEANING
- ⊕ RESPECTS JOINTS AND STEEL



Water based Professional



STAIN RESCUE REMOVER

COD. 00034723


EXTRA STRONG DETERGENT

Extra strong solvent-based cleaner. Ready to use, it is ideal for removing greasy dirt and

removing suction cup marks from surfaces.

**EXTRA STRONG****REMOVES GREASY DIRT****IT ALSO REMOVES SUCTION CUP MARKS**

◆ Ready to use

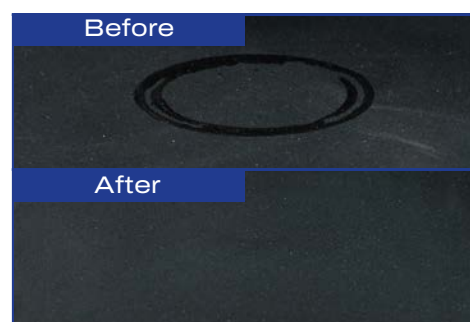**Natural stone • Ceramic • Quartz****Solvent based**

Sealer & Wax Remover

DETERSOLVENT

COD. ART 00034691



Natural stone • Ceramic • Quartz



Detersolvent for removing application errors, layers of old treatments and waxes of all types. Removes accumulated greasy and stubborn dirt.



EXTRA STRONG REMOVAL OF OLD TREATMENTS



RESTORES SURFACES



IDEAL FOR EXCESS AND INCORRECT APPLICATION



Solvent based



Anti Slip

ANTI-SLIP TREATMENT

COD. ART 00034587



Natural stone • Ceramic • Quartz



Ultimate anti-slip treatment for granite, engineered stone and ceramic. The water-based product makes the floor safe even in wet conditions without creating surface film and leaving no residue.



DEFINITIVE



DOES NOT CREATE SURFACE FILM



EFFECTIVE EVEN IN WET CONDITIONS

- ◆ Ideal for stairs, entrances, swimming pools, both indoor and outdoors.



Water based



Anti Slip M

ANTI-SLIP TREATMENT FOR MARBLE

COD. ART 00034588



Natural stone



Ultimate anti-slip treatment for marble. The water-based product makes the floor safe even in wet conditions without creating surface film and leaving no residue.



DEFINITIVE



DOES NOT CREATE SURFACE FILM



EFFECTIVE EVEN IN WET CONDITIONS

- ◆ Ideal for stairs, entrances, swimming pools, both indoor and outdoors.



Water based



	Product	Briotop	Booster Alk Easy	Booster Alk Sgras.	Booster Acid	Mold Remover	Rust Remover	H2O Wax Remover	Stain Rescue Remover	Sealer & Wax Remover
Chemical properties	PH	8	9,5	12	2,1	3,5	2	13,5	Non- polar blend	Non- polar blend
	Notes	Slightly alkaline	Slightly alkaline	Alkaline	Acidic	Acidic	Acidic	Alkaline		
Use	Requires rinsing	◇◇◇◇◇	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
	Requires dilution	◇◇◇◇◇	◇◇◇◇◇	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
	Suitable on wet surfaces	◆◆◆◆◇	◆◆◆◆◇	◆◆◆◆◇	◆◆◆◆◇	◆◆◆◆◇	◆◆◆◆◇	◆◆◆◆◇	◆◆◆◆◇	◆◆◆◆◇
Materials	Marble	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◇	◆◆◆◆◇	◆◆◆◆◇	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
	Granite	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◇	◆◆◆◆◇	◆◆◆◆◇	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
	Quartzite	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◇	◆◆◆◆◇	◆◆◆◆◇	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
	Limestone	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◇	◆◆◆◆◇	◆◆◆◆◇	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
	Terrazzo	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◇	◆◆◆◆◇	◆◆◆◆◇	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
	Engineered Stone	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◇	◆◆◆◆◇	◆◆◆◆◇	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
	Ceramic	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◇	◆◆◆◆◇	◆◆◆◆◇	◆◆◆◆◆	◆◆◆◆◆	◆◆◆◆◆
Aesthetic characteristic										
	Removes gloss	×	×	×	✓	✓	✓	×	×	×

[illegible]

TITANIUM & GRAVITY: EPD VERIFIED

*Two high-performance Tenax solutions,
now with a verified Environmental Product Declaration.*

Titanium Solido and Gravity are the first Tenax products accompanied by an Environmental Product Declaration (EPD): transparent, verified environmental data to support customers, partners and designers.

A new step in Tenax's journey towards performance, transparency and documented sustainability.



Titanium

Transparent solid vinylester glue, extra strong and fast.
Excellent stability.

- ⊕ Extra strong and fast bonding
- ⊕ Low yellowing
- ⊕ Ideal for visible bonding



Gravity

Transparent vinylester glue, extra strong and ultra-fast,
featuring resistance to frost and heat and excellent
stability.

- ⊕ Extreme, ultra-fast bonding
- ⊕ Low yellowing
- ⊕ Ideal for visible bonding



See the official EPD for TITANIUM and GRAVITY
Registered and published on The International EPD® System — EPD-IES-0033444:001 |
Scan the QR code to view the full declaration

*LCA based | Third-party verified | International EPD System. Verification carried out by SGS ICS Italia. Valid until 17.08.2031.
LEED® and BREEAM® are registered trademarks of their respective owners and are mentioned for descriptive purposes only.



Performance meets responsibility

Understanding LCA and EPD

Sustainability also depends on the ability to measure and transparently communicate the environmental impact of products. With the EPD for Titanium and Gravity, Tenax provides environmental data that is verified and based on LCA methodology.


LCA measures. EPD communicates.

Measuring the impact

LCA – Life Cycle Assessment is the methodology used to assess the environmental impacts associated with a product's life cycle.

Communicating with transparency

EPD – Environmental Product Declaration is the environmental declaration that communicates the results of the LCA study in a standardized and transparent way. It is independently verified and gives customers and professionals access to documented environmental information.

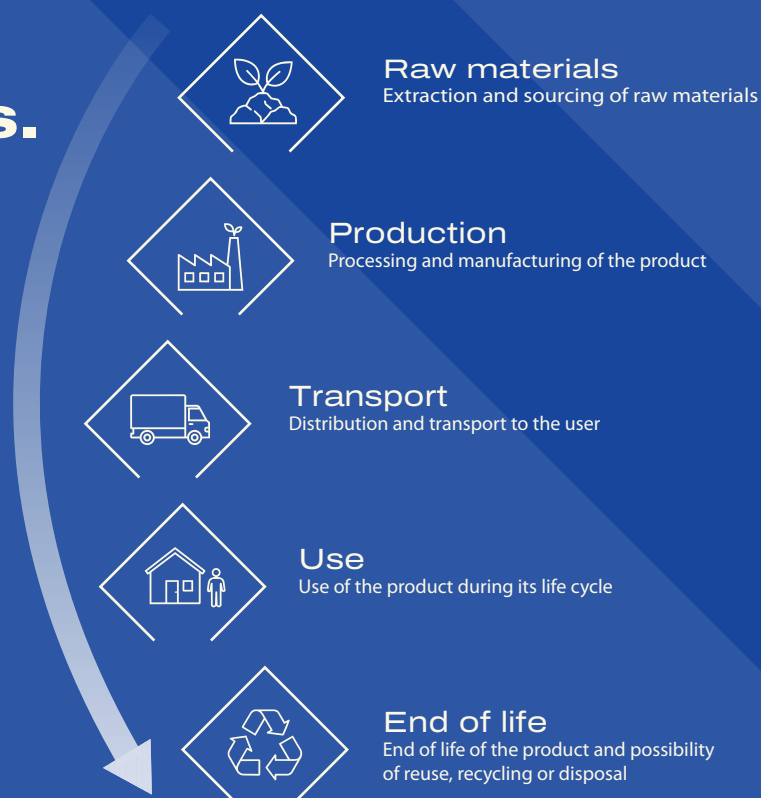

Environmental data for the project

The information contained in the EPD can support designers and professionals within the main building sustainability protocols and criteria, depending on the requirements of each project. LEED® | BREEAM® | CAM



Transparency
Verifiable environmental data.



Credibility
Recognized methodologies and independent verification.



Design
Environmental information supporting the project.



Green building
Support for sustainability criteria.

TENAX Spa

Via I° Maggio, 226 - 37020 Volargne (VR) - ITALY
tenax@tenax.it - tenax.it

Voc Gold product Range

Recognition obtained by Eurofins indoor air comfort



Natural stone



Quartz



Ceramic



Glaxs Easy



Glaxs Fast



✦ **Extra strong bonding**

✦ **Extra clear**

✦ **Easy dosing**

✦ **Extra strong**

✦ **Zero Halos**

✦ **Maximum stability in sunlight**

**Il prodotto ha superato i requisiti previsti da EUROFINS ed è conforme con tutti i regolamenti nazionali obbligatori (ad esempio: French A+, CAM Edilizia, Belgian Regulation, AgBB, etc.) e gli schemi di sostenibilità ambientale quali LEED, BREEAM, WELL. Per maggiori informazioni consultare la sezione apposita in www.tenax.it/certificazioni

**The product has passed the requirements set by EUROFINS and complies with all mandatory national regulations (for example: French A+, CAM Edilizia, Belgian Regulation, AgBB, etc.) and environmental sustainability schemes such as LEED, BREEAM, WELL. For further information, please consult the dedicated section in www.tenax.it/en/certifications

TENAX Spa

Via I° Maggio, 226 - 37020 Volargne (VR) - ITALY
tenax@tenax.it - tenax.it



Voc Gold product Range

Recognition obtained by Eurofins indoor air comfort



Natural stone



Quartz



Ceramic



Skudo



High protection



Ideal for countertops and large areas



Weather resistant

“Il prodotto ha superato i requisiti previsti da EUROFINS ed è conforme con tutti i regolamenti nazionali obbligatori (ad esempio: French A+, CAM Edilizia, Belgian Regulation, AgBB, etc.) e gli schemi di sostenibilità ambientale quali LEED, BREEAM, WELL. Per maggiori informazioni consultare la sezione apposita in www.tenax.it/certificazioni”

“The product has passed the requirements set by EUROFINS and complies with all mandatory national regulations (for example: French A+, CAM Edilizia, Belgian Regulation, AgBB, etc.) and environmental sustainability schemes such as LEED, BREEAM, WELL. For further information, please consult the dedicated section in www.tenax.it/en/certifications”

TENAX Spa

Via I° Maggio, 226 - 37020 Volargne (VR) - ITALY
tenax@tenax.it - tenax.it



Gamma completa di colle con Food Safety Declaration

Complete range of glue with Food Safety Declaration

Chimica Vinilestere *Vinylester Chemical*



Indoor

Titanium cartridge



Natural stone



Quartz



Ceramic

Chimica Epossidica *Epoxy Chemical*



Indoor
Outdoor



Elix cartridge



Natural stone



Quartz



Ceramic



Elix A+B



Natural stone



Quartz



Ceramic



"I prodotti, una volta applicati come indicato nella sezione "Istruzioni d'uso" della Scheda Tecnica, rispettano i limiti di migrazione globali facenti riferimento al regolamento DM 21/09/1973 e REG. UE 10/2011."

"The products, once applied as indicated in the "Instructions for use" section of the Technical Data Sheet, comply with the global migration limits referred to in the Ministerial Decree 21/09/1973 and EU Regulation 10/2011."

TENAX Spa

Via I° Maggio, 226 - 37020 Volargne (VR) - ITALY
tenax@tenax.it - tenax.it



Gamma completa di trattamenti protettivi con Food Safety Declaration

*Complete range of protective
treatments with Food Safety Declaration*

Trattamenti Effetto naturale *Natural effect treatments*



Proseal FS



Natural stone Quartz



Hydrex



Natural stone Quartz Ceramic



Skudo



Natural stone Quartz Ceramic

Trattamenti Effetto ravvivante *Color enhancer treatments*



Ager FS



Natural stone Quartz



Toner



Natural stone Quartz

TENAX Spa

Via I° Maggio, 226 - 37020 Volargne (VR) - ITALY
tenax@tenax.it - tenax.it



Tenax in the world



OUR BRANCHES

ITALY
VERONA (HQ)

BRAZIL
VITORIA

SPAIN
ALICANTE

CHINA
SHANGAI E SHUITOU

INDIA
BANGALORE

TURKIYE
IZMIR

USA
CHARLOTTE

HEADQUARTERS TENAX S.p.a

Via I Maggio, 226/263

37020 Volargne (VR) - ITALY

P +39 045 686 0222

F +39 045 686 2456

tenax@tenax.it

REV 08/26

ITALY

BRAZIL

SPAIN

CHINA

INDIA

TURKIYE

USA

Distributed by



TENAX.IT

